




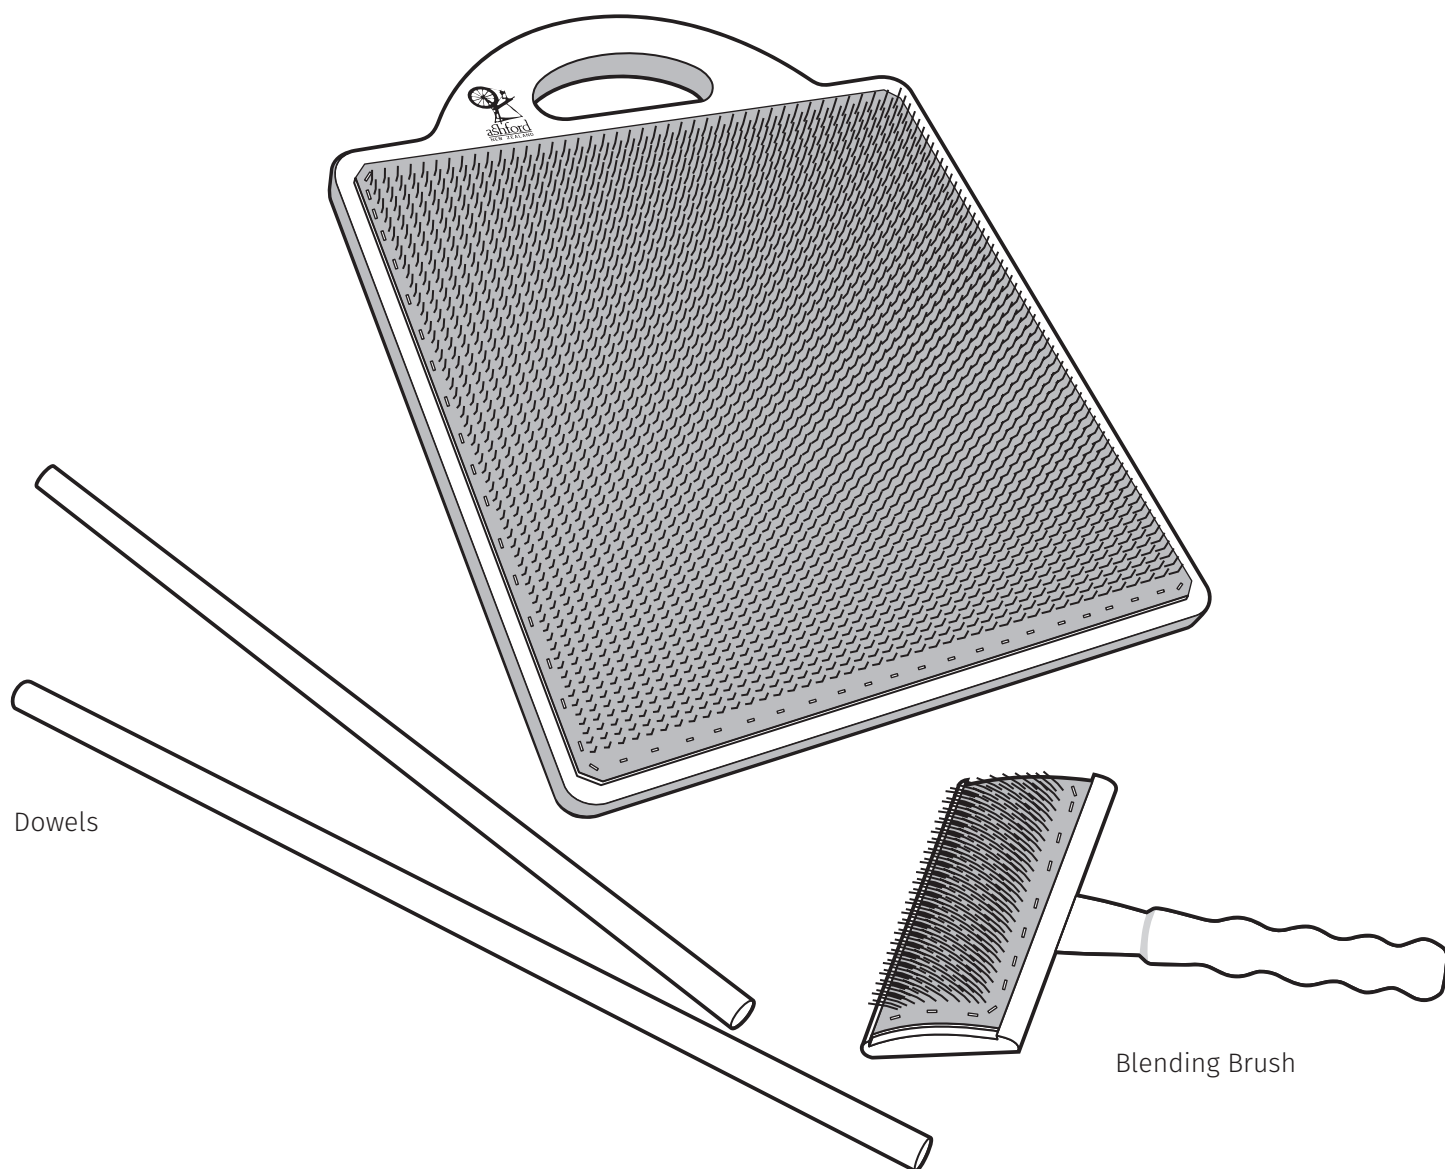


Ashford Guarantee

Thank you for purchasing this Ashford product. In the unlikely event of a fault in manufacture, please contact the dealer you purchased it from.


Ashford Blog

For inspirational articles, patterns and projects. Subscribe for free www.ashford.co.nz/blog

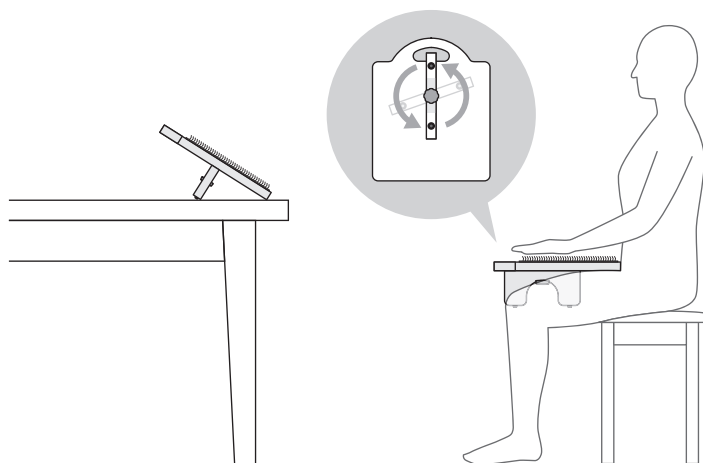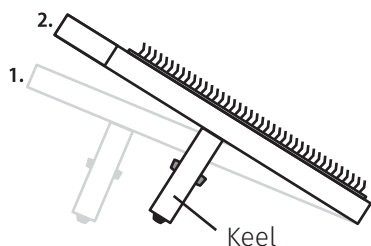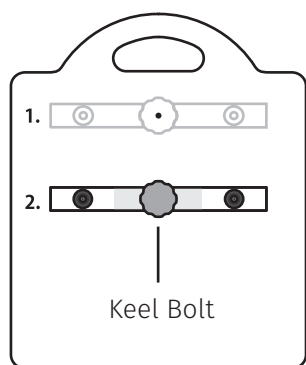


1. Attach the keel to the blending board with the keel bolt. Use position 1 when working on a table or position 2 when working on your lap.


2. To use the blending board on your lap, loosen the keel bolt slightly, position the keel between your knees with the handle away and rotate the blending board to a comfortable working position.

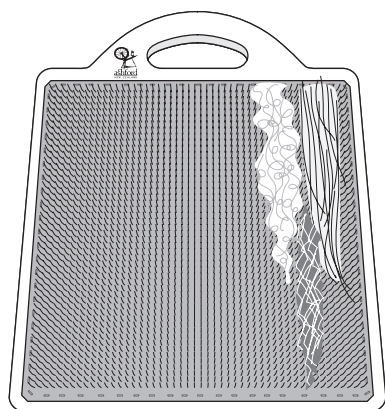


3. Starting at the handle end, apply thin layers of fibre onto the teeth mixing colours and fibres as you go.

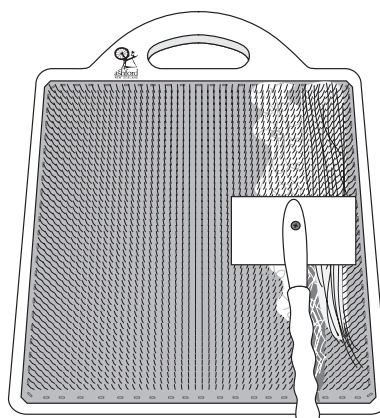

4. Use the blending brush to pack the fibres down into the teeth. Apply more layers of fibre and brush into the teeth until the board is full.

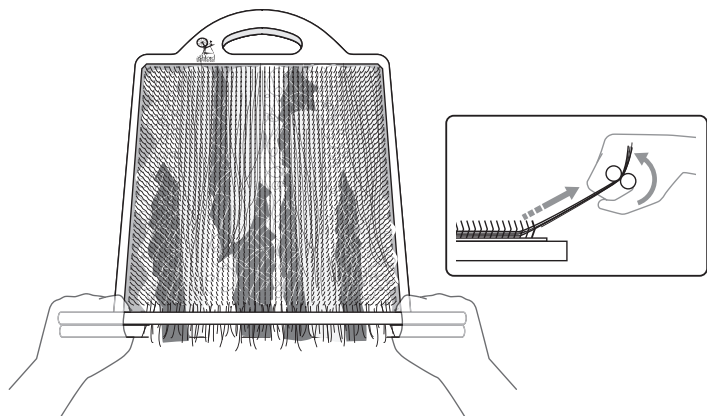

5. To remove the fibre and make a rolag, pull some fibres out from the bottom and wrap them around one dowel. Then trap these fibres by holding the second dowel on top of the first. **Note:** If needed, smooth the surface of the wooden dowels with the sandpaper provided.

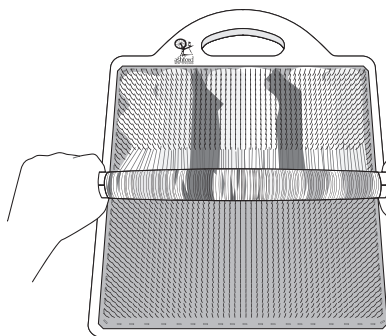

6. Pull the dowels towards you stretching and carding the fibres. Then wrap these fibres around both dowels as you draft. You can easily make 4 or more rolags from each full board.



7. Slide one dowel out of the rolag and then the other. Your fibre is now ready to spin into beautiful yarn.

More Information



How-to videos on YouTube
Watch our how-to videos on YouTube @AshfordNZ



Facebook
Join us on facebook ashford.wheels.ooms



Instagram
Join us on instagram ashford_wheels_looms



Blog
For inspirational articles, patterns and projects. Subscribe for free to the Ashford Blog www.ashford.co.nz/blog